

DATA: 16/02/2023

T72B510400D0: E-NGXM 4/110-PCD

DATI POMPA E MOTORE


n (rpm):	2800	Poli:	2
N. di giranti:	1	In (A):	4.8
H max (m):	40.80	PF:	0.96
H min (m):	19.90	C (mF):	30
Q min (mc/h):	0.30	Vc (V):	450
Q max (mc/h):	4.50	Classe di isolamento:	F
Pn (kW):	0.75	Servizio:	S1
Pn (HP):	1.00	Min temperatura del liquido (°C):	-10.00 °C
Diametro girante (mm):	130.00	Max temperatura del liquido (°C):	35
Tipo motore:	IM	P1 (kW):	1.00 kW
Fasi motore:	1~	Peso (kg):	11.060
Un (V):	230	Protezione:	IP X4
fn (Hz):	50		

MATERIALI

Corpo pompa:	Acciaio inox AISI 304	Elettore:	Noryl PPO-GF20
Coperchio del corpo:	Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304)	Albero:	Acciaio inossidabile al Cr 1.4104 EN 10088 (AISI 430F)
Girante:	Noryl PPO-GF20	Tenuta meccanica:	Carbone-Ceramica-NBR
Diffusore:	Noryl PPO-GF20		

DATA: 16/02/2023

T72B510400D0: E-NGXM 4/110-PCD

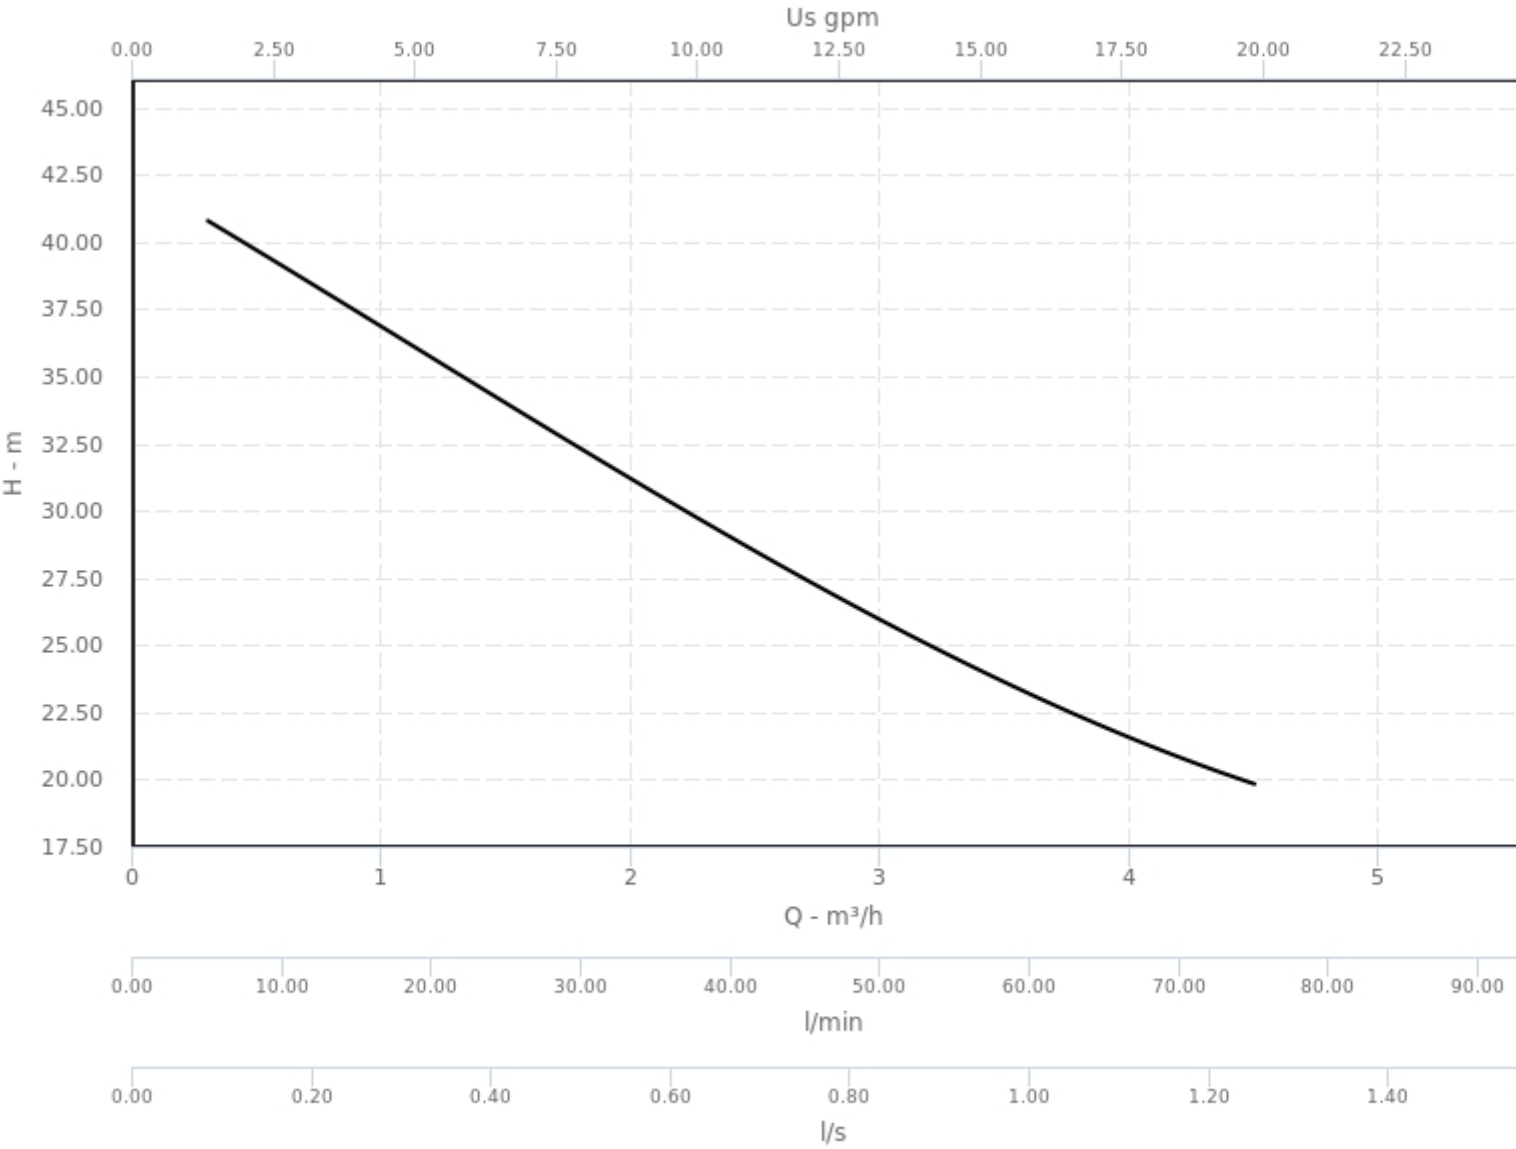

DATA: 16/02/2023

T72B510400D0: E-NGXM 4/110-PCD

DIMENSIONI (MM)

dn1: G 1
dn2: G 1
a: 145.00 mm
m1: 33.00 mm
m2: 25.00 mm
m3: 8.00 mm
n1: 146.00 mm
n2: 112.50 mm
b: 30.00 mm
fM: 420.00 mm
I5: 161
g1: 10.00 mm
h1: 116.00 mm
h2: 119.00 mm
HD: 228.00 mm
w: 95.00 mm

