

DATA: 30/09/2022

72U70150000: GXRM 13

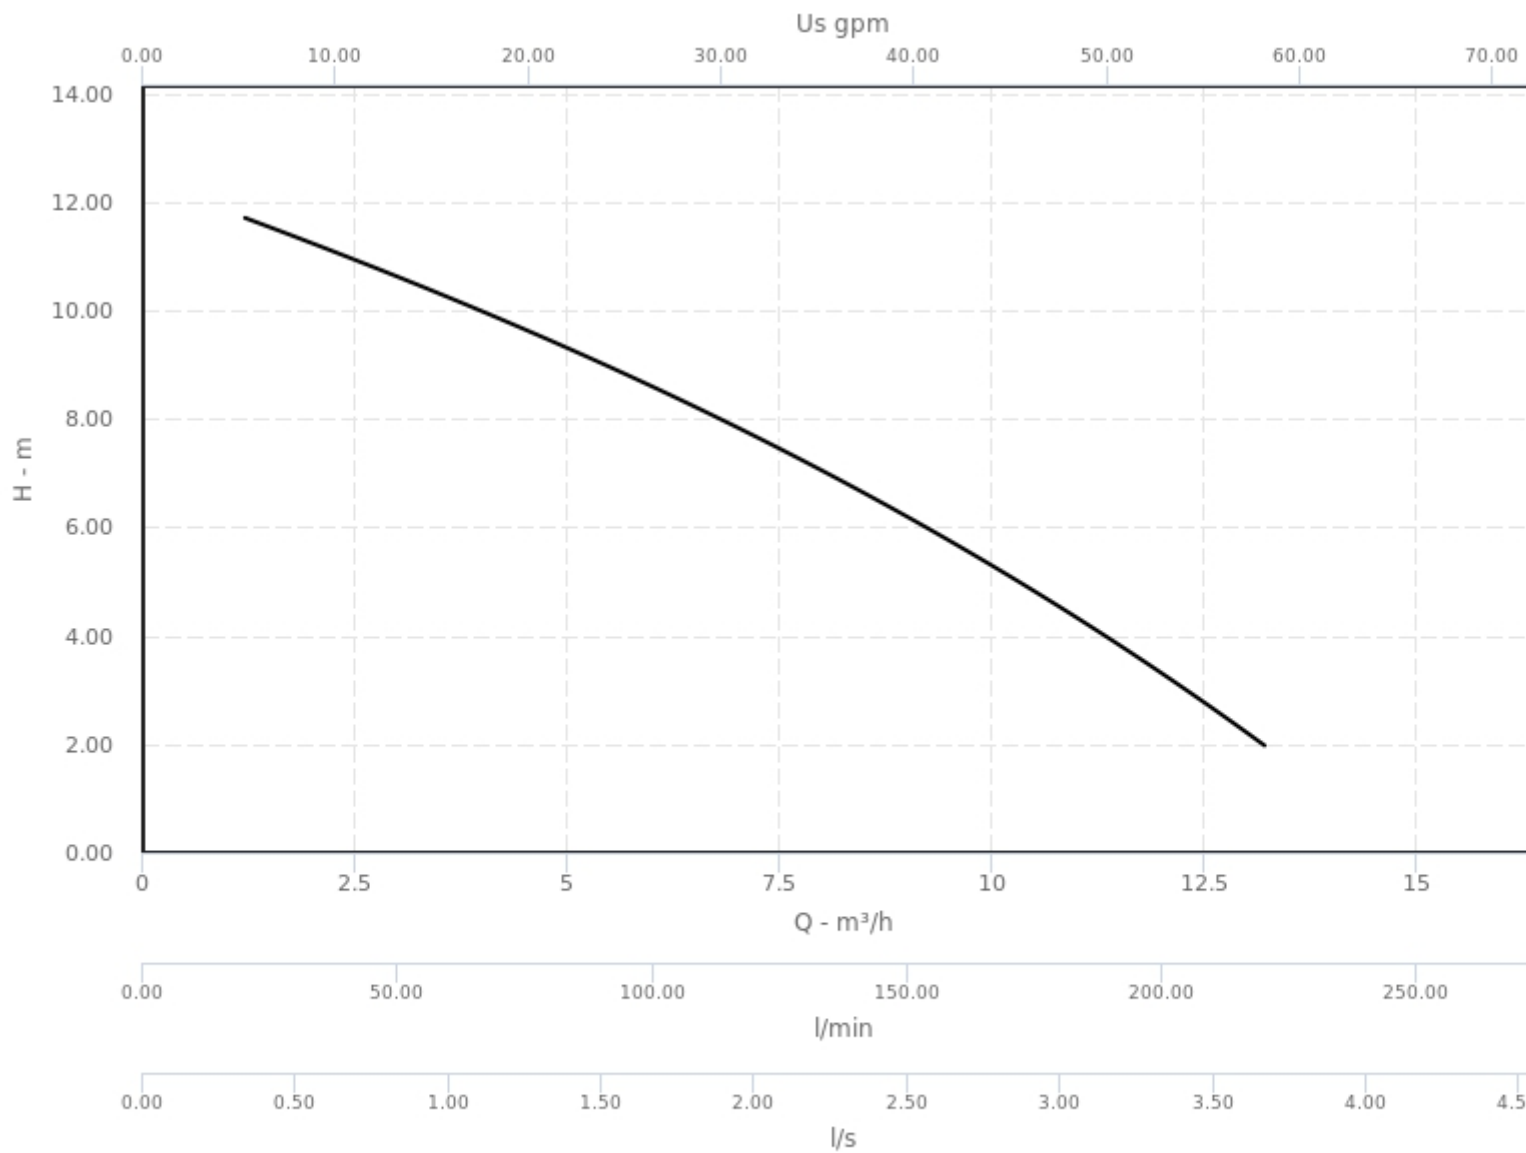
DATI POMPA E MOTORE

n (rpm):	2900	Poli:	2
H max (m):	11.70	In (A):	4.5
H min (m):	2.00	PF:	0.9
Q min (mc/h):	1.20	C (mF):	16
Q max (mc/h):	13.20	Vc (V):	450
Pn (kW):	0.45	Classe di isolamento:	F
Pn (HP):	0.60	Servizio:	S1
Tipo motore:	IM	Ia/In:	2.90
Fasi motore:	1~	P1 (kW):	0.95 kW
Un (V):	230	Peso (kg):	7.200
fn (Hz):	50	Protezione:	IP X8

MATERIALI

Camicia pompa:	Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304)	Albero:	Acciaio inossidabile al Cr-Ni 1.4305 EN 10088 (AISI 303)
Maniglia:	Polipropilene	Tenuta meccanica:	Allumina-Carbene-NBR
Corpo pompa:	Acciaio inox AISI 304	Filtro:	Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304)
Girante:	Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304)	Olio lubrificazione tenuta:	Olio bianco per uso alimentare farmaceutico
Camicia motore:	Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304)		

DATA: 30/09/2022

72U70150000: GXRM 13

DATA: 30/09/2022

72U70150000: GXRМ 13

DIMENSIONI (MM)

dn2: G 1 1/4
a: 265.00 mm
fM: 300.00 mm
I3: 56.00 mm
I5: 176
ps: 10
Lmin: 70.00 mm
Lmax: 340.00 mm

