

DATA: 24/02/2023

70B51040000: NGLM 4/110


DATI POMPA E MOTORE

n (rpm):	2800	Poli:	2
N. di giranti:	1	In (A):	5.4
H max (m):	40.00	PF:	0.96
H min (m):	21.10	C (mF):	20
Q min (mc/h):	0.30	Vc (V):	450
Q max (mc/h):	4.50	Classe di isolamento:	F
Pn (kW):	0.75	Servizio:	S1
Pn (HP):	1.00	Max temperatura del liquido (°C):	35
Diametro girante (mm):	130.00	Ia/In:	3.30
Tipo motore:	IM	P1 (kW):	1.00 kW
Fasi motore:	1~	Peso (kg):	13.020
Un (V):	230	Protezione:	IP 54
fn (Hz):	50		

MATERIALI

Corpo pompa:	Ghisa GJL 200 EN 1561	Diffusore:	Noryl PPO-GF20
Coperchio del corpo:	Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304)	Eiettore:	Noryl PPO-GF20
Girante:	Noryl PPO-GF20	Albero:	Acciaio inossidabile al Cr 1.4104 EN 10088 (AISI 430F)
Anello tenuta girante:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Tenuta meccanica:	Carbone-Ceramica-NBR

DATA: 24/02/2023
70B51040000: NGLM 4/110

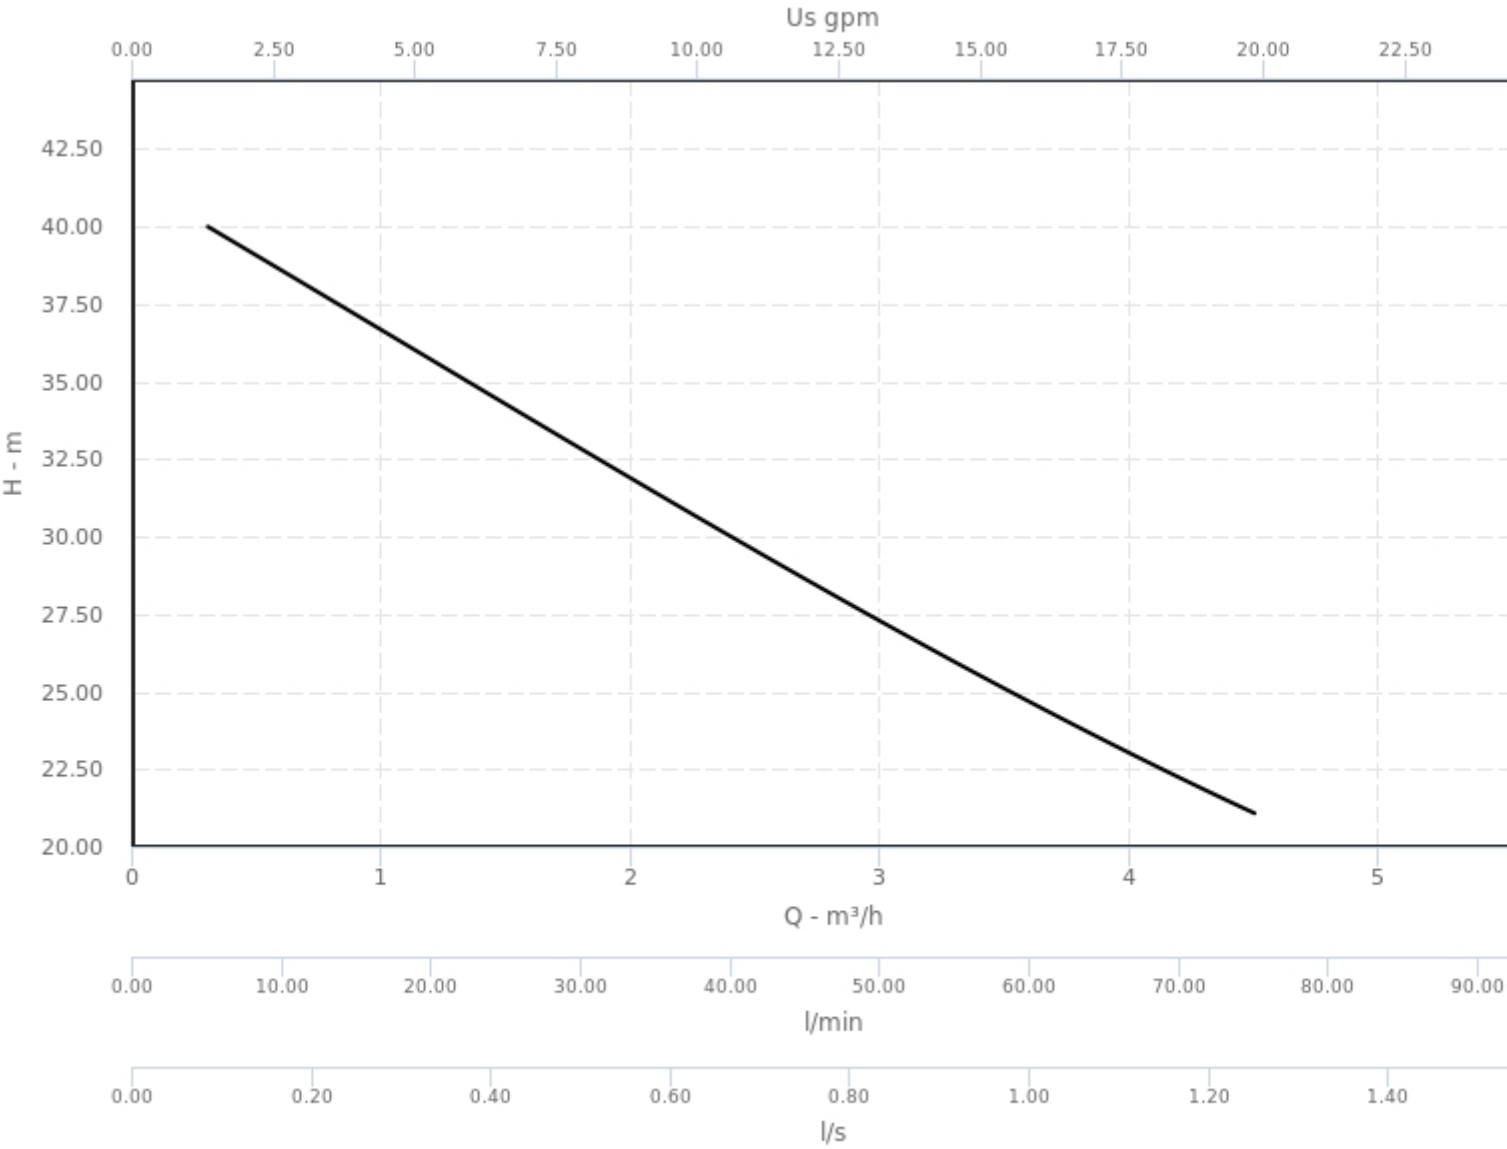

DATA: 24/02/2023

70B51040000: NGLM 4/110

DIMENSIONI (MM)

dn1: G 1
dn2: G 1
a: 115.00 mm
m1: 33.00 mm
m2: 25.00 mm
m3: 8.00 mm
n1: 146.00 mm
n2: 112.00 mm
b: 30.00 mm
fM: 391.00 mm
l5: 161.00
g1: 10.00 mm
h1: 116.00 mm
h2: 61.00 mm
HD: 192.00 mm
w: 95.00 mm
w1: 112.00 mm

